

75
YEARS
1947 - 2022



FROMM | WRAPPING SOLUTIONS


FV300 Series 25 WiFi
Semi-Automatic
Vertical Wrapping Machines

FV300 Series 25 WiFi

The FV300 Series 25 WiFi, semi-automatic vertical wrapping machines are equipped with a multi lingual touch screen OP and WiFi, for easy operation and service communication. Including 7 programs, under which Paper, Eco and Stop & Go mode.

With their High-Speed Twin Film roll wrapping technology the FV300 Series belongs to the FROMM EasyWrap™ family of wrapping machines; Plug-and-Play, Easy to install and to Operate by multiple operators. Changing film rolls is a breeze.

Their simple & straightforward design and the use of branded parts, makes them a durable, reliable, easy to maintain and energy efficient partner. Ideally suited for quickly and efficiently wrapping and/or bandaging all kinds of products, in small series or single pieces; long simple bundles or irregular products.

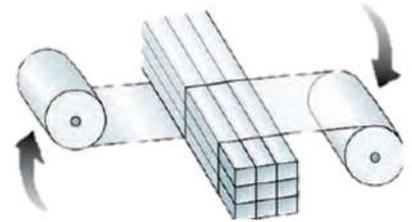

Features and Benefits

- Safe and Sound for carefree and Long-Life operation
- Durable and accessible design, Easy to maintain
- The Productivity Service pack in combination with **WiFi** enables you to properly plan your service intervals
- With a choice of six different ring diameters, from 50 to 250 cm (19.7 to 98 inches), you can select the optimal ring-to-package ratio for the best wrapping results.
- The closed wrapping ring construction offers additional safety during the wrapping process.
- The Twin Film Roll Dispenser lets you wrap up to 1.8x faster than standard single-roll technology.
- Both film roll holders are equipped with a mechanical brake, allowing you to stretch the film as needed for the desired wrapping result.
- The wrapping speed can be adjusted as needed, taking into account the film used, the shape, and the length of the package.
- The robust foot control allows the operator to feed the product with both hands during wrapping.
- Various options are available, including a foil cutting device, top and side guided rollers.



Technical Data

- Power supply & consumption 230V 50/60Hz 0,26-0,55 kWh
- Air pressure, required to operate the film cutting device (option) 6 Bar.
- Ring speed, adjustable between 5 - 350 rpm.
- Ring speed inverter and PLC: Fuji and Omron
- Ring diameters : 50/90/125/160/200/250 cm (19.7 / 35 / 49 / 63 / 78 / 98")
- Processes film thicknesses: 17/20/23/30 micron, of all quality film producers
- Handles film roll widths: 100 / 170 or 250 mm (39 / 67 / 98")

Ask your FROMM representative for more information and discuss any need for pre-testing with different products.

FROMM | WRAPPING SOLUTIONS

Further information

www.fromm-pack.com



Your FROMM distributor